CIRCA TABLE

DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its integrated USB charging port, 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

FIXTURE TYPE

Table

LIGHT SOURCE

LED Flat-Panel

PRODUCT CODES

Circa Table Graphite:	CIRC TBL GPT
Circa Table White:	CIRC TBL WHT

LIGHT CONTROL

Optical Switch (4-stage control. 100%, 50%, 15%, off)

FEATURES

360° shade rotation 45° shade tilt in two directions USB charging port Ships flat-packed

SPECIFICATIONS

Voltage: 120/220V 60Hz Power Consumption: 8.5W Color temperature: 2700K Luminosity: 380 Lumens

Luminaire efficacy: 45 Lumens/Watt

Color Rendition Index: 85 CRI

ADA compliant Title 20 compliant 50K hour lifespan Cord length: 8' (244cm)

Global multi-plug adapter available

1 year warranty

CERTIFICATIONS





PACKAGING WEIGHT AND DIMENSIONS

8.45LBS 15" X 14" X 4" Circa Table :

3.8KGS 38cm X 36cm X 10cm

Custom requests can be considered on volume orders



FINISHES








DIMENSIONS

CIRCA TABLE



CIRCA FLOOR

DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its integrated USB charging port, 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

FIXTURE TYPE

Floor

LIGHT SOURCE

LED Flat-Panel

PRODUCT CODES

Circa Floor (Graphite):	CIRC FLR GPT
Circa Floor (White):	CIRC FLR WHT
Circa Floor+Ped. (Graphite):	CIRC FLR GPT +PEDESTAL
Circa Floor+Ped. (White):	CIRC FLR WHT +PEDESTAL

LIGHT CONTROL

Optical Switch (4-stage control. 100%, 50%, 15%, off)

FEATURES

360° shade rotation 45° shade tilt in two directions USB charging port Ships flat-packed

SPECIFICATIONS

Voltage: 120/220V 60Hz Power Consumption: 9.5W Color temperature: 2700K Luminosity: 435 Lumens

Luminaire efficacy: 46 Lumens/Watt

Color Rendition Index: 85 CRI

ADA compliant
Title 20 compliant
50K hour lifespan
Cord length: 8' (244cm)

Global multi-plug adapter available

1 year warranty

CERTIFICATIONS





PACKAGING WEIGHT AND DIMENSIONS

PACKAGING WEIGHT	AND DIMEN	310113
Circa Floor:	21.9LBS	29" X 18" X 3.5"
	9.9KGS	74cm X 46cm X 9cm
Circa Floor Pedestal:	2.85LBS	11" X 11" X 3"
	13KGS	28cm X 28cm X 8cm

NOTES


Custom requests can be considered on volume orders



FINISHES



DIMENSIONS

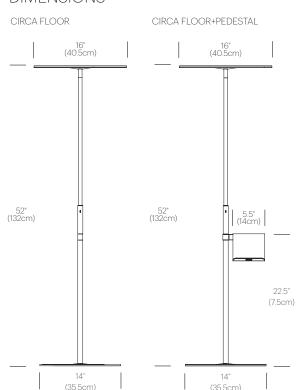



CIRCA WALL

DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its integrated USB charging port, 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

FIXTURE TYPE

Wall

LIGHT SOURCE

LED Flat-Panel

PRODUCT CODES

Circa Wall 12 Graphite:	CIRC WAL 12 GPT
Circa Wall 12 White:	CIRC WAL 12 WHT
Circa Wall 16 Graphite:	CIRC WAL 16 GPT
Circa Wall 16 White:	CIRC WAL 16 WHT

LIGHT CONTROL

Optical Switch (4-stage control. 100%, 50%, 15%, off)

FEATURES

360° shade rotation 45° shade tilt in two directions USB charging port Ships flat-packed

SPECIFICATIONS

Voltage: 120/220V 60Hz Power Consumption: 8.5W Color temperature: 2700K Luminosity: 380 Lumens

Luminaire efficacy: 45 Lumens/Watt Color Rendition Index: 85 CRI

ADA compliant Title 20 compliant 50K hour lifespan

Cord length: 8' (244cm) (Field Cuttable) Global multi-plug adapter available

1 year warranty

CERTIFICATIONS





PACKAGING WEIGHT AND DIMENSIONS

Circa Wall 12:	5.75LBS	15" X 14" X 4"
	2.6KGS	38cm X 36cm X 10cm
Circa Wall 16 :	9.05LBS	18.5" X 18" X 4"
	4.1KGS	47cm X 46cm X 10cm

NOTES


Custom requests can be considered on volume orders



FINISHES



DIMENSIONS

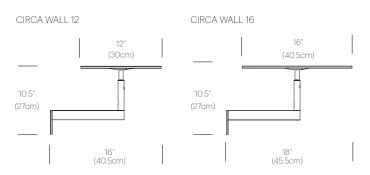

CIRCA PENDANT

DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

FIXTURE TYPE

Pendant

LIGHT SOURCE

LED Flat-Panel

PRODUCT CODES

Circa Pendant 12 Graphite:	CIRC PND 12 GPT
Circa Pendant 12 White:	CIRC PND 12 WHT
Circa Pendant 16 Graphite:	CIRC PND 16 GPT
Circa Pendant 16 White:	CIRC PND 16 WHT

LIGHT CONTROL

Hard wired (Triac transformer) ELV dimmer recommended

FEATURES

360° shade rotation 45° shade tilt in two directions Ships flat-packed

SPECIFICATIONS

Voltage: 120/220V 60Hz Power Consumption: 11.5W Color temperature: 2700K Luminosity: 522 Lumens

Luminaire efficacy: 45 Lumens/Watt

Color Rendition Index: 85 CRI

Title 20 compliant 50K hour lifespan

Cord length: 10' (305cm) (Field Cuttable)

1 year warranty

CERTIFICATIONS





PACKAGING WEIGHT AND DIMENSIONS

Circa Pendant 12:	5.75LBS	15" X 14" X 4"
	2.6KGS	38cm X 36cm X 10cm
Circa Pendant 16 :	9.05LBS	18.5" X 18" X 4"
	4.1KGS	47cm X 46cm X 10cm


NOTES

Custom requests can be considered on volume orders


FINISHES



DIMFNSIONS



UNIVERSAL CHANDELIER CANOPY



Universal Canopy available for 3, 5 and 7 lamp configurations. Consult website for configuration options

